


# ストレートローラー φ60.5

三相

Motor  
Roller

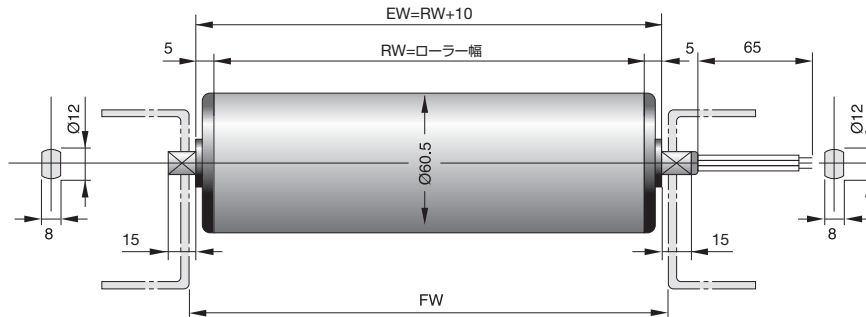

ストレートローラー寸法・重量表

RW=ローラー幅(FW-12)	250	300	400	500	600	700	800
フレーム内寸(FW)	262	312	412	512	612	712	812
重量(kg)	2.7	3.0	3.4	3.9	4.3	4.8	5.2
ワンタッチ取付機構	×	○	○	○	○	○	○

220/380/  
415V  
50Hz

型式	周速度 (m/分)	接線力 (N)	トルク (Nm)	電流(A)		入力電力 (W)
				無負荷	起動	
60S 4-[ ]-3-[ ]	4.8	142	4.3	220V 0.1	220V 0.18	220V 20
60S 6-[ ]-3-[ ]	6.9	104	3.1			
60S 8-[ ]-3-[ ]	9.0	80	2.4			
60S10-[ ]-3-[ ]	11.1	61	1.9			
60S13-[ ]-3-[ ]	15.3	52	1.6	380V 0.07	380V 0.15	380V 22
60S15-[ ]-3-[ ]	18.5	43	1.3			
60S20-[ ]-3-[ ]	22.2	31	0.9			
60S25-[ ]-3-[ ]	27.5	26	0.8	415V 0.07	415V 0.15	415V 22
60S30-[ ]-3-[ ]	33.8	21	0.6			
60S35-[ ]-3-[ ]	37.0	18	0.5			
60S45-[ ]-3-[ ]	47.6	13	0.4			

1N=0.102kgf 1Nm=10.2kgf-cm

220/380/  
480V  
60Hz

型式	周速度 (m/分)	接線力 (N)	トルク (Nm)	電流(A)		入力電力 (W)
				無負荷	起動	
60S 4-[ ]-3-[ ]	5.3	123	3.7	220V 0.09	220V 0.18	220V 19
60S 6-[ ]-3-[ ]	7.9	85	2.6			
60S 8-[ ]-3-[ ]	10.6	61	1.9			
60S10-[ ]-3-[ ]	12.7	44	1.3			
60S13-[ ]-3-[ ]	18.5	37	1.1	380V 0.06	380V 0.12	380V 20
60S15-[ ]-3-[ ]	21.2	32	1.0			
60S20-[ ]-3-[ ]	25.4	25	0.7			
60S25-[ ]-3-[ ]	31.7	19	0.6	480V 0.06	480V 0.12	480V 20
60S30-[ ]-3-[ ]	38.1	15	0.5			
60S35-[ ]-3-[ ]	44.4	13	0.4			
60S45-[ ]-3-[ ]	57.1	10	0.3			

1N=0.102kgf 1Nm=10.2kgf-cm